

UNIVERSAL ISN 165



2 way kit

- Butyl surround
Resilient material, promoting long life
- Laser engraved serial number
Certificate of authenticity

- Polyglass cone
Neutral sound without coloration


- ABS chassis
Strong rigid and non-magnetic chassis

- Phase plug
Better dispersion

- TNB inverted dome tweeter
Detailed and non directive

- Terminal integrated to the basket
Compact

- Neodymium magnet
Shallow woofer, easy installation
- Voice-coil cooling system
Optimum reliability, performance consistency

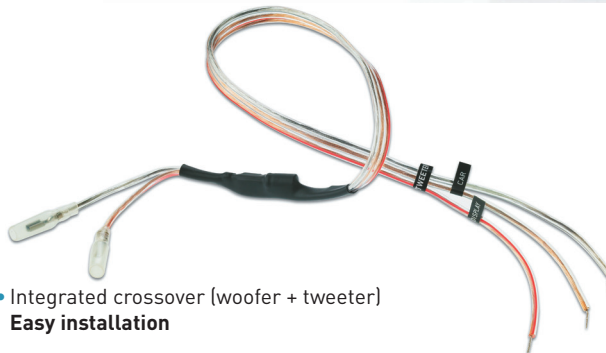

- Integrated crossover (woofer + tweeter)
Easy installation



Focal logo (aluminium -diamond cutting)



ISO connector (woofer)

ADVANTAGES

- High compatibility with shallow original space
- High sensitivity
- Deep bass and neutral midrange
- Neodymium magnet: powerful & compact: 67,4mm (with rubber cap) & 45 mm (without cap)
- 2 tweeter supports accessories



Removable tweeter



Tilted mounting
Easy installation



Assembly option :
car and display

TECHNICAL CHARACTERISTICS

Woofer: 6¹/₂" (165mm)
Voice-coil diameter: 9¹/₄" (32mm)
Voice-coil height: 0²/₁₆" (10,5mm)
Magnet: Neodymium

Aluminum inverted dome TNB tweeter
Integrated crossover: 6db/oct (Woofer) / 12 db/oct (Tweeter)
Max. power: 120W

Nom. power: 60W rms
Sensitivity (2,83 V/1 m): 92.7dB
Frequency response: 60Hz - 28kHz
Accessories: Supplied without grille.
Crossover on connector (woofer and tweeter).

