


FPS 1500

 symmetric amplifier

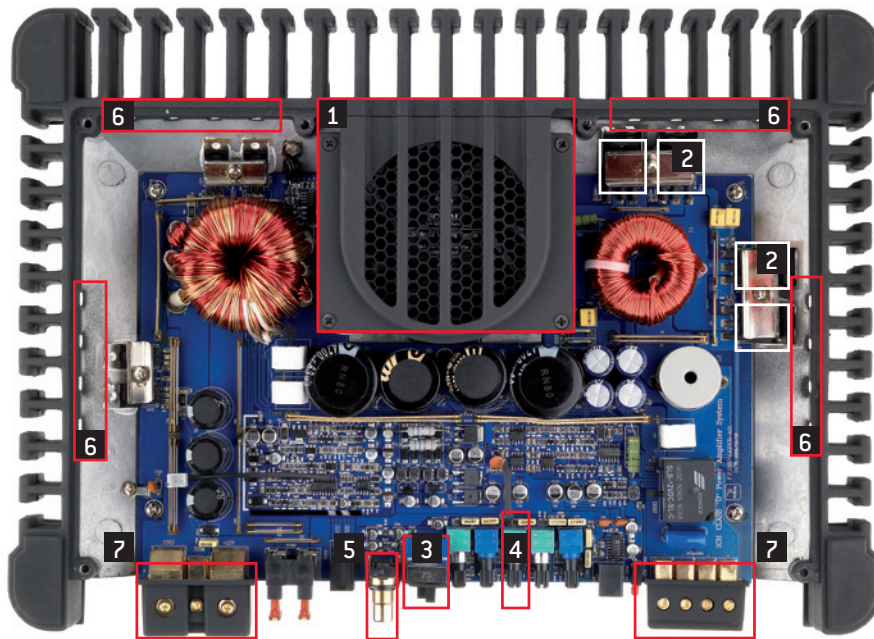

- 1 Progressive controlled cooling system
Regulates the amplifier temperature
- 2 Mosfets (IRFP250N)
Audiophile and powerful
- 3 Direct mode
The audio signal is directly amplified
- 4 Low-pass crossovers
Adjustable from 50Hz to 500Hz
- 5 Pseudo-balanced input
No parasite
- 6 Controlled cooling system
Air flow control
- 7 Safety terminal
Cable and sheath complete integration

Technical characteristics:

2006 CEA power (4 Ohms, $\leq 1\%$ THD+N, 14.4 Volts): 1x320W

Nom. power: 1x500W into 2 Ohms, with 0.4% THD

Nom. power: 1x750W into 1 Ohm with 0.8% THD

Adjustable low-pass crossover from 50Hz to 500Hz

Direct mode

Protections: short-circuit, direct current, thermal overload, polarity reversal

It makes the difference:

- Remote control
- Direct mode
- Stable into 1 Ohm
- High-Cap compatible
- Class D amplification
- Full Mosfet

